

DELO



DELO[®] FLEXCAP[®]

Foil Cartridge System for
Bubble-free Adhesive Dispensing

DELO[®] FLEXCAP[®] 10 ml and 30 ml



The new cartridge system: DELO® FLEXCAP® 10 ml and 30 ml with pressure tank

DELO® FLEXCAP®: Reliable, bubble-free adhesive dispensing

The unique cartridge system allows bubble-free dispensing of adhesives with viscosities ranging from low to high. Adhesives from the DELO® KATIOBOND®, DELO® PHOTOBOND®, DELO DUALBOND® and DELO® MONOPOX product families are particularly good to dispense.

A flexible, hermetically tight foil replaces the conventional cartridge piston. This prevents air from penetrating the adhesive volume past the piston during storage, transport and dispensing. The foil cartridge with bubble-free adhesive enables the highest dispensing reliability, precision and maximum emptying.




All DELO® products are developed and produced in Germany, ensuring the highest quality of design and manufacture.



Watch the video:
www.youtube.com/DELOadhesives



Volume change upon temperature fluctuations

The adhesive can contract under the influence of cold during storage.

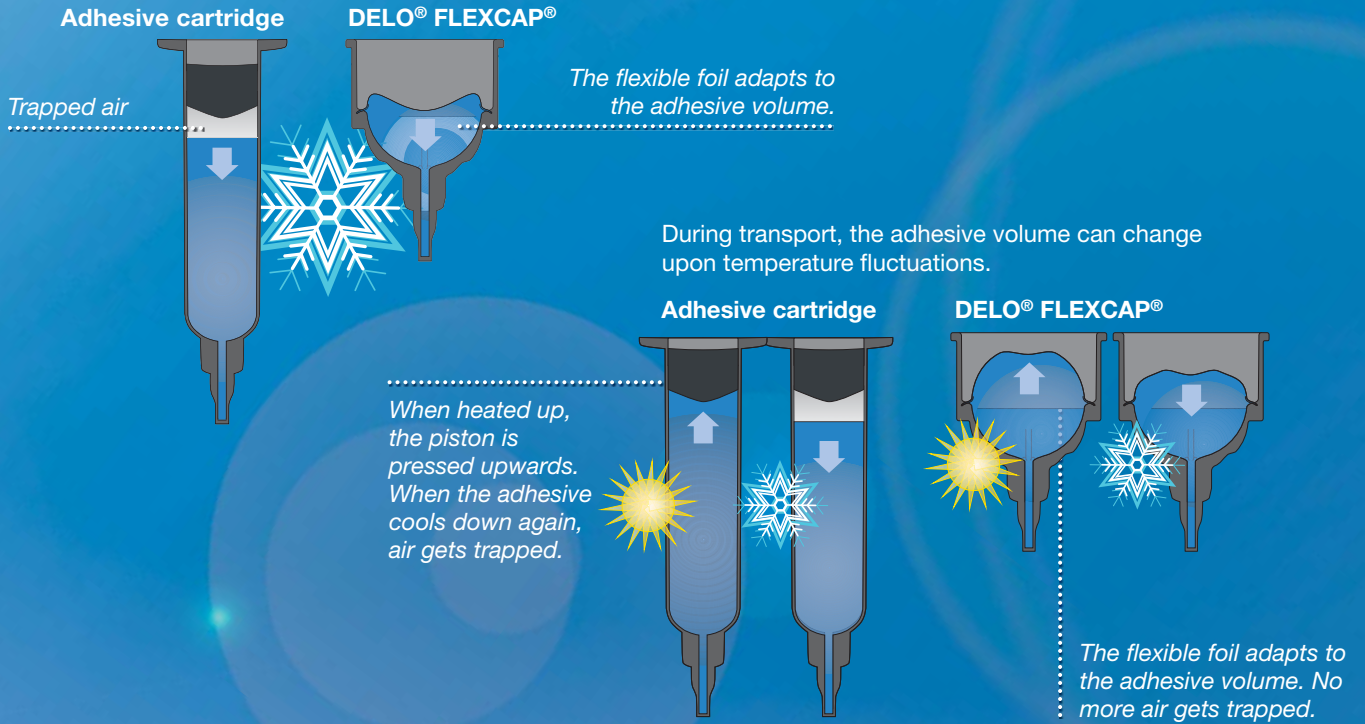

Pressurization during dispensing

When pressurized, the conventional cartridge slightly expands. Consequently, air penetrates the adhesive chamber.

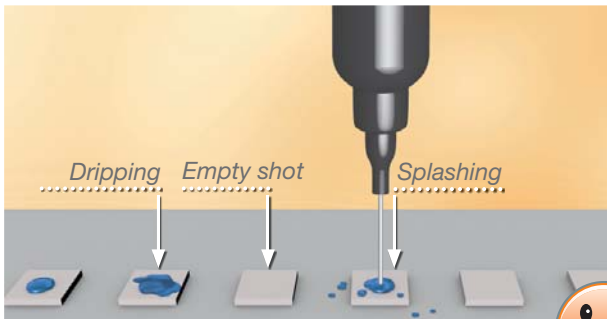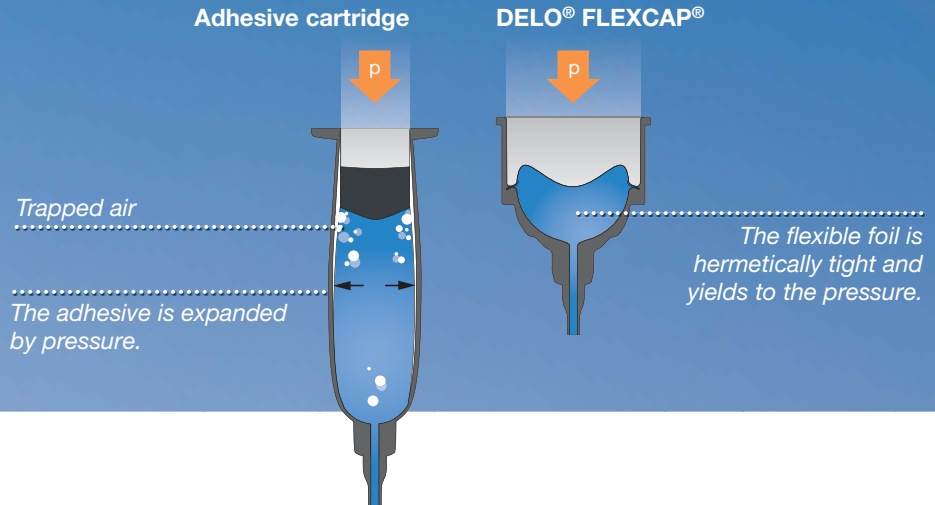

Air bubbles trapped in the adhesive may lead to faulty dispensing, such as dripping, empty shots or splashing.



The bubble-free adhesive in the DELO® FLEXCAP® cartridge is precisely dispensed even under harsh conditions.



The innovative
DELO® FLEXCAP®
foil cartridge



The pressure tank
with integrated
fill level sensor



DELO® FLEXCAP®

Properties	Advantages
Flexible membrane instead of piston	<ul style="list-style-type: none"> ✓ Cost savings due to complete emptying ✓ Piston-free design eliminates friction, allowing for high dispensing accuracy ✓ Airtight during storage, transport and use, enabling easy and cost-efficient dry ice transport
Bubble-free adhesive	<ul style="list-style-type: none"> ✓ Reproducible dispensing results ✓ Reliable adhesive dispensing ✓ High production reliability and reproducible quality ✓ Cost savings thanks to reduced component waste (high yield)

The DELO® FLEXCAP® foil cartridge is a fully enclosed cartridge. What sets it apart is that it is absolutely air- and bubble-free during dispensing. The pressure tank with integrated fill level sensor is very beneficial in a controlled production process. In short: DELO® FLEXCAP® is a powerful new development!

Thomas Huber, Process Engineer, Robert Bosch GmbH

A reliable system:
DELO® FLEXCAP® with pressure tank
and integrated fill level sensor



Pressure tank with fill level sensor

The pressure tank of DELO® FLEXCAP® is equipped with a fill level sensor, providing benefits mainly in fully automated production.

Integrated sensors transmit a signal that indicates when the cartridge is nearly empty and completely empty. As a result, the user can prepare a new cartridge in time to achieve maximum productivity.

Properties	Advantages
Pressure tank with electronic fill level sensor	✓ Professional process control
Compact design	✓ Easy to integrate into every production system
Pressure tank with ergonomic bayonet closure	✓ Quick cartridge exchange
Quick coupling for compressed air	✓ Easy and reliable system integration


Safety-relevant applications benefit enormously from the increased reliability of dispensing

- RFID
- Casting of electronic components, such as sensors
- Bonding of mini-cameras (CCM)
- and many more




Bubble-free dispensing...

Dimensions in inches

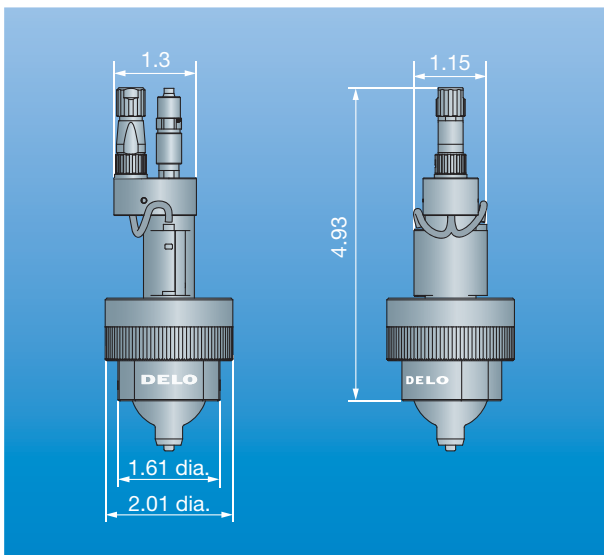

DELO® FLEXCAP® 10 ml with pressure tank

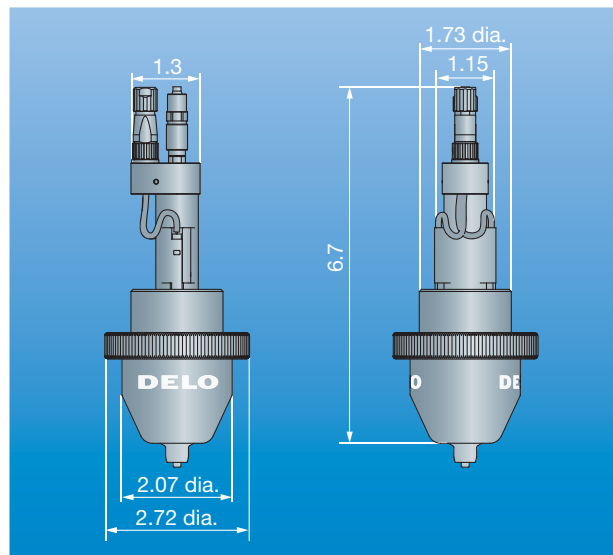

DELO® FLEXCAP® 30 ml with pressure tank



The DELO-DOT® PN jet valve with DELO® FLEXCAP® 30 ml in pressure tank with fill level sensor

...with a reliable system

Designation	Article number
DELO®-XPRESS 923 NK, pressure tank with fill level sensor for DELO® FLEXCAP® 30 ml	91 100 13
DELO®-XPRESS 923, pressure tank without fill level sensor for DELO® FLEXCAP® 30 ml	91 100 12
DELO®-XPRESS 921 NK, pressure tank with fill level sensor for DELO® FLEXCAP® 10 ml	91 100 24
DELO®-XPRESS 921, pressure tank without fill level sensor for DELO® FLEXCAP® 10 ml	91 100 16

Case study: Lens barrel to holder bonding

To achieve perfect image quality, the lenses and image sensors of cameras must be aligned with maximum precision. The combination of our foil cartridge and jet valve ensures reliable and reproducible adhesive dispensing – at maximum speed.





CONTACT

DELO Industrial Adhesives

▶ **USA** · Sudbury, MA
Phone +1 978 254 5275
usa@DELO-adhesives.com
www.DELO-adhesives.com/us

▶ **China** · Shanghai
Phone +86 21 2898 6569
china@DELO-adhesives.com
www.DELO-adhesives.com/cn

▶ **South Korea** · Seoul
Phone +82 31 450 3038
korea@DELO-adhesives.com
www.DELO-adhesives.com/en

▶ **Germany** · Windach/Munich
Phone +49 8193 9900-0
info@DELO.de
www.DELO.de

▶ **Singapore**
Phone +65 6807 0800
singapore@DELO-adhesives.com
www.DELO-adhesives.com/en

▶ **Taiwan** · Taipei
Phone +886 2 6639 8248
taiwan@DELO-adhesives.com
www.DELO-adhesives.com/cn

▶ **Malaysia** · Kuala Lumpur
Phone +65 6807 0800
malaysia@DELO-adhesives.com
www.DELO-adhesives.com/en

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of a product for the intended purpose by considering all specific requirements and by applying standards the customer deems suitable (e. g. DIN 2304-1). Type, physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. All data provided are typical average values or uniquely determined parameters measured under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for a specific purpose. Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent. All products provided by DELO are subject to DELO's General Terms of Business. Verbal ancillary agreements are deemed not to exist.

© DELO® – This brochure including any and all parts is protected by copyright. Any use not expressly permitted by the Urheberrechtsgesetz (German Copyright Act) shall require DELO®'s written consent. This shall apply without limitation to reproductions, duplications, disseminations, adaptations, translations and microfilms as well as to the recording, processing, duplication and/or dissemination by electronic means.

07/17

Adhesives

Dispensing

Curing

Consulting

DELO