

DELO DUALBOND® GE4906

UV/light and humidity-curing acrylate adhesive, low viscosity

Base

- modified urethane acrylate
- one-component, solvent-free

Use

- dualcuring adhesive for electronic applications: pin casting, pin sealing
- good adhesion to a variety of plastics
- flexible
- the cured product is normally used in a temperature range of -40 °C to +150 °C; depending on the application, other limits may be more reasonable

Processing

- the adhesive is supplied ready for use; in case of cool or refrigerated storage, it must be ensured that the container is conditioned to room temperature before use
- the containers are conditioned at room temperature (max. 25 °C); the conditioning time is approx. 0.5 h for containers up to 50 ml and approx. 4 h for containers up to 1,000 ml; additional heat addition is not allowed
- the adhesive is usually applied by dispensing
- the adhesive can be processed well from the original container or with DELO dispensing units
- the surfaces to be bonded must be dry as well as free of dust, grease and other contaminations
- use DELOTHEN cleaners for the cleaning of bonding surfaces
- for further information please refer to our instructions for use DELO DUALBOND and the brochure "Light Curing"

Curing

- with UV light or visible light in a wavelength range of 320 - 450 nm and by humidity in shadow zones
- humidity curing starts at the surface of the acrylate; a skin is formed after a few hours; deep curing of the acrylate proceeds with approx. 2mm/24h

Lamp type	DELOLUX 20 / 50 / 80		
Wavelength [nm]	365	400	460
Suitability	+	++	-


- not suitable + suitable ++ especially suitable

Curing parameters

- dependent on material thickness and absorption, adhesive layer thickness, lamp type and distance between lamp and adhesive layer

Absorption spectrum

- photoinitiation system in acrylate matrix

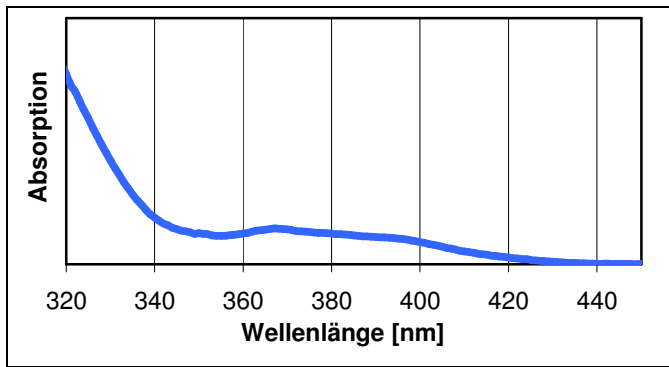

Technical data

Color	yellowish
cured in a layer thickness of approx. 0.1 mm	
Fluorescence	yellow emitting
Density [g/cm ³] at room temperature (approx. 23 °C)	1,01
Viscosity [mPas] at 23 °C, rheometer, PP20, gap 500µm, shear rate 10/s	2200
Minimal curing time [s] DELO Standard 23, LED intensity: 200 mW/cm ² , DELOLUXcontrol	7
Curable layer thickness [mm] DELO Standard 20 curing lamp DELOLUX 20, 400 nm intensity: 200 mW/cm ² DELOLUXcontrol duration of exposure: 60 s	>4
Compression shear strength glass/PA [MPa] DELO Standard 5 LED 400nm, intensity: 200mw/ cm ² , DELOLUXcontrol, irradiation time: 60s 72h at 23 °C/50% relative humidity	2
Compression shear strength glass/PBT [MPa] DELO Standard 5 LED 400nm, intensity: 200mw/ cm ² , DELOLUXcontrol, irradiation time: 60s 72h at 23 °C/50% relative humidity	1
Compression shear strength glass/stainless steel [MPa] DELO Standard 5 LED 400nm, intensity: 200mw/ cm ² , DELOLUXcontrol, irradiation time: 60s 72h at 23 °C/50% relative humidity	2
Elongation at tear [%] according to DIN EN ISO 527	500
Young's modulus [MPa] according to DIN EN ISO 527	<100
Tensile strength [MPa] according to DIN EN ISO 527	3
Shore hardness A according to DIN EN ISO 868	24
Glass transition temperature [°C] DELO Standard 24	10

Coefficient of linear expansion [ppm/K] DELO Standard 26 TMA in a temperature range of +40 °C to +60 °C	225
Dielectric constant according to DIN 53483-2:1970-03 measured value at 1 MHz	2.8
Volume shrinkage [%] DELO Standard 13	5.6
Water absorption [weight %] according to DIN EN ISO 62	1.1
Processing time at room temperature (max. 25 °C)	4 weeks
Storage life at 0 °C to +10 °C in unopened original container	6 months

Instructions and advice

General

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of a product for the intended purpose by considering all specific requirements and by applying standards the customer deems suitable (e. g. DIN 2304-1). Type, physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. All data provided are typical average values or uniquely determined parameters measured under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for a specific purpose.

Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent.

All products provided by DELO are subject to DELO's General Terms of Business. Verbal ancillary agreements are deemed not to exist.

Instructions for use

The instructions for use of DELO DUALBOND are available on: www.DELO.de. We will be pleased to send them to you on demand.

Occupational health and safety

see material safety data sheet

Specification

The properties in italics are part of the specification. Ranges with clear limits are defined for them and others, where applicable. In the course of the QA test, each batch is tested for these properties and the maintenance of the limits is ensured. The measuring methods used can deviate from those specified in the data sheet. Details can be found in the QA test report.