

# DELO-DUOPOX<sup>®</sup> CR8031

**modified epoxy resin | 2C | room-temperature-curing**

unfilled | very good temperature resistance, suitable for DELO-AUTOMIX

### Special features of product

- compliant with RoHS Directive 2015/863/EU
- Long-term preheating of components is possible
- Remove the mixing tube immediately after finishing work. Store the cartridge vertically with the new mixing tube
- Any formation of bubbles during homogenization or mixing can be significantly minimized by using a processing system with vacuum unit

### Function

- encapsulant / potting compound

### Typical area of use

- -40 - 180 °C

### Curing

Curing time

<i>until initial strength at rt approx. +23 °C tensile shear strength 1 - 2 MPa</i>	8	h
<i>until functional strength at rt approx. +23 °C tensile shear strength &gt; 10 MPa</i>	16	h
<i>until final strength at rt approx. +23 °C</i>	7	d
<i>until functional strength at +80 °C tensile shear strength &gt; 10 MPa</i>	0.25	h
<i>until final strength at +80 °C</i>	1	h

### Processing

Mixing ratio A : B - volume	2 : 1
Mixing ratio A : B - weight	2.37 : 1

Processing time after mixing

*in 100 g batch  
at rt approx. +23 °C* 85 min

Reaction temperature (max.)

*in 100 g batch* 120 °C

Storage life in unopened original container

*at +15 °C to +30 °C* 6 month(s)

**Technical properties**

Color in cured condition in 1 mm layer thickness black

Transparency in cured condition in 1 mm layer thickness opaque

**Parameters**

Density  
*Component A | liquid* 1.15 g/cm<sup>3</sup>

Density  
*Component B | liquid* 0.97 g/cm<sup>3</sup>

Viscosity  
*Component A | liquid | Rheometer | Shear rate: 10 1/s | Gap: 37 µm* 18000 mPa·s

Viscosity  
*Component B | liquid | Rheometer | Shear rate: 10 1/s | Gap: 37 µm* 11000 mPa·s

Tensile shear strength  
*Based on DIN EN 1465 | **AI** | **AI** | Pretreatment: sand-blasted | at approx. +23 °C | 168 h* 16 MPa

Tensile shear strength  
*Based on DIN EN 1465 | **AI** | **AI** | Pretreatment: sand-blasted | 80 °C | 1 h* 28 MPa


Tensile strength  
*Based on DIN EN ISO 527 | at approx. +23 °C | 7 d* 40 MPa

Tensile strength  
*Based on DIN EN ISO 527 | 80 °C | 1 h* 48 MPa

Elongation at tear  
*Based on DIN EN ISO 527 | at approx. +23 °C | 7 d* 5 %


Elongation at tear <i>Based on DIN EN ISO 527   80 °C   1 h</i>	3	%
Young's modulus <i>Based on DIN EN ISO 527   at approx. +23 °C   7 d</i>	1700	MPa
Young's modulus <i>Based on DIN EN ISO 527   80 °C   1 h</i>	2100	MPa
Shore hardness D <i>Based on DIN EN ISO 868   at approx. +23 °C   7 d</i>	72	
Glass transition temperature <i>DMTA   at approx. +23 °C   7 d</i>	102	°C
Glass transition temperature <i>DELO Standard 26   TMA   at approx. +23 °C   7 d</i>	66	°C
Coefficient of linear expansion <i>DELO Standard 26   TMA   Evaluation T: 30 °C - 50 °C   at approx. +23 °C   7 d</i>	112	ppm/K
Coefficient of linear expansion <i>DELO Standard 26   TMA   Evaluation T: 80 °C - 160 °C   at approx. +23 °C   7 d</i>	200	ppm/K
Shrinkage <i>DELO Standard 13   at approx. +23 °C   7 d</i>	4	vol. %
Water absorption <i>Based on DIN EN ISO 62   at approx. +23 °C   7 d   Type of storage: Media   Medium: Distilled water   Storage temperature: at approx. +23 °C   Duration: 24 h</i>	0.23	wt. %
Decomposition temperature <i>DELO Standard 36   at approx. +23 °C   7 d   Type of storage: Temp.   Storage temperature: 100 °C   Duration: 24 h</i>	252	°C
Relative permittivity <i>Based on RF-IV   1 GHz</i>	3	
Relative permittivity <i>Based on RF-IV   1 MHz</i>	3.2	
Relative permittivity <i>Based on RF-IV   10 MHz</i>	3.2	
Relative permittivity <i>Based on RF-IV   100 MHz</i>	3.1	

Substrates: Al/Al, based on DIN EN 1465

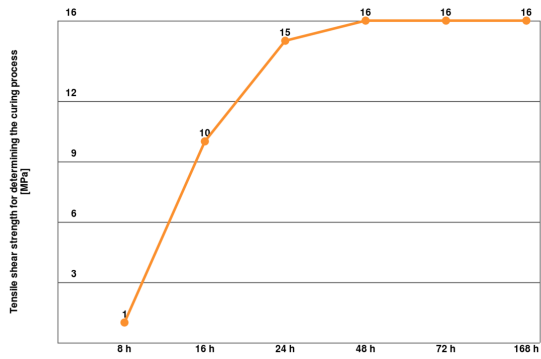


at room temperature (approx. 23°C)


Substrates: A/W, based on DIN EN 1465

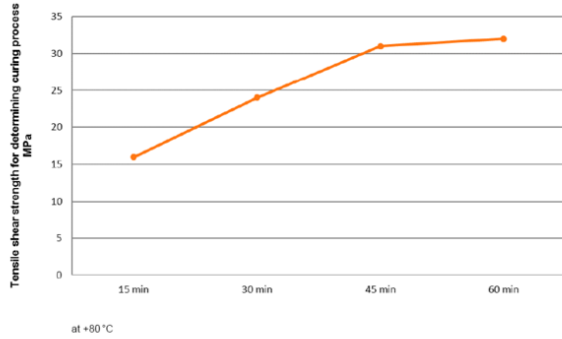


Tensile strength after temperature storage / based on DIN EN ISO 527  
7d RT

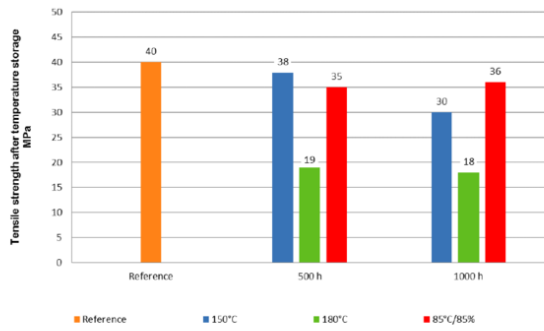


Tensile strength after temperature storage / based on DIN EN ISO 527  
1h +80°C

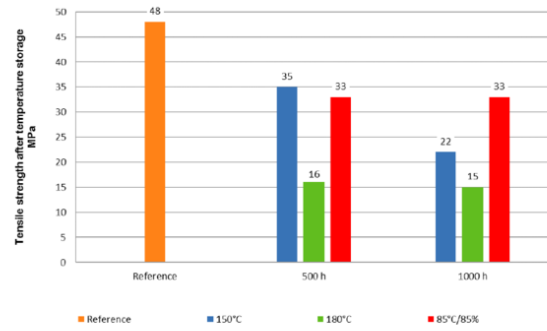


Elongation at tear after temperature storage / based on DIN EN ISO 527  
7d RT

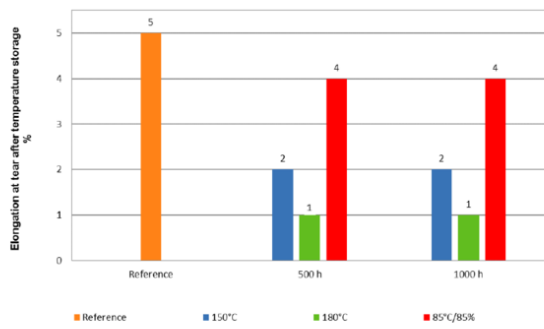


Elongation at tear after temperature storage / based on DIN EN ISO 527  
1h +80°C

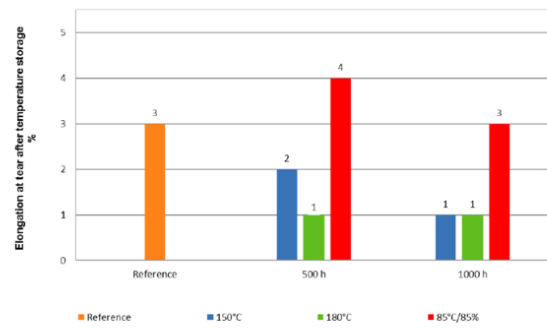

Young's Modulus after temperature storage / based on DIN EN ISO 527  
7d RT

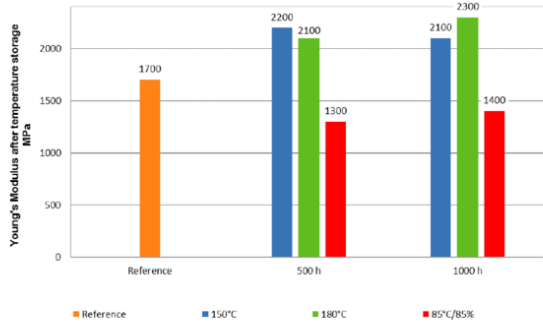

Young's Modulus after temperature storage / based on DIN EN ISO 527  
1h +60°C

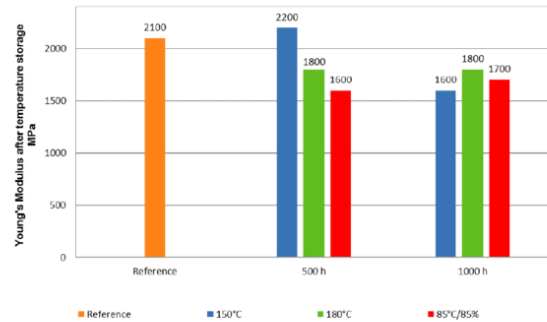

### Converting table

°F	= (°C x 1.8) + 32	1 MPa	= 145.04 psi
1 inch	= 25.4 mm	1 GPa	= 145.04 ksi
1 mil	= 25.4 µm	1 cP	= 1 mPa·s
1 oz	= 28.3495 g	1 N	= 0.225 lb

### General curing and processing information

The curing time stated in the technical data was determined in the laboratory. It can vary depending on the adhesive quantity and component geometry and is therefore a reference value. Curing can be supported or accelerated by heat input. Additional heat input can change the physical properties of the product. Values measured after 24 h at approx. 23 °C / 50 % r.h., unless otherwise specified.

### General

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of a product for the intended purpose by considering all specific requirements and by applying standards the customer deems suitable (e. g. DIN 2304-1). Type, physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. All data provided are typical average values or uniquely determined parameters measured under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for a specific purpose.

Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent.

All products provided by DELO are subject to DELO's General Terms of Business. Verbal ancillary agreements are deemed not to exist.

### Instructions for use

You can find further details in the instructions for use.  
The instructions for use are available on [www.DELO-adhesives.com](http://www.DELO-adhesives.com).  
We will be pleased to send them to you on demand.

### Occupational health and safety

See material safety data sheet.

### Specification

Nothing contained in this Technical Datasheet shall be interpreted as any express warranty or guarantee. This Technical Datasheet is for reference only and does not constitute a product specification. Please ask our responsible Sales Engineer for the applicable product specification which includes defined ranges. DELO is neither liable for any values and content of this Technical Datasheet nor for oral or written recommendations regarding the use, unless otherwise agreed in writing. This limitation of liability is not applicable for damages resulting from intent, gross negligence or culpable breach of cardinal obligations, nor shall it apply in case of death or personal injury or in case of liability under any applicable compulsory law.

## CONTACT