

# Flexible Liquid Seals – Cured within Seconds

## Sealing in second intervals

DELO® Industrial Adhesives has developed new light-curing liquid sealants (FIGP/CIPG = Form In Place Gasket/Cure In Place Gasket) for sealing and protecting housing covers. These products can be reliably applied in their liquid state directly from the cartridges onto the housing elements.

Then, they cure within seconds by exposure to light. Thus, they fulfill the growing demand for short cycle times and easy automation. Their good elastic recovery enables reliable sealing during later joining of the components.

## Application areas


- Electronic/household devices: Sealing of telephone housings, loudspeaker assembly, sealing of handles
- Automotive: Sealing of oil pans, electrical controls, engine covers, pumps, gear parts, door handles

## Your benefits

- Large production volumes without process interruption possible
- High process reliability and system availability
- Complex component geometries possible (short machine changeover times)
- No seals must be kept on stock (saving of material and storage costs)
- Fluorescence allows detection (vs. black elastomer on black housing)

## Product properties

- Curing in seconds without applying heat
- Immediate final strength allows direct continuation of the production process
- “Curing on demand” (curing only upon irradiation)
- Good elastic recovery/low compression set
- One-component, solvent-free
- PWIS-free/silicone-free

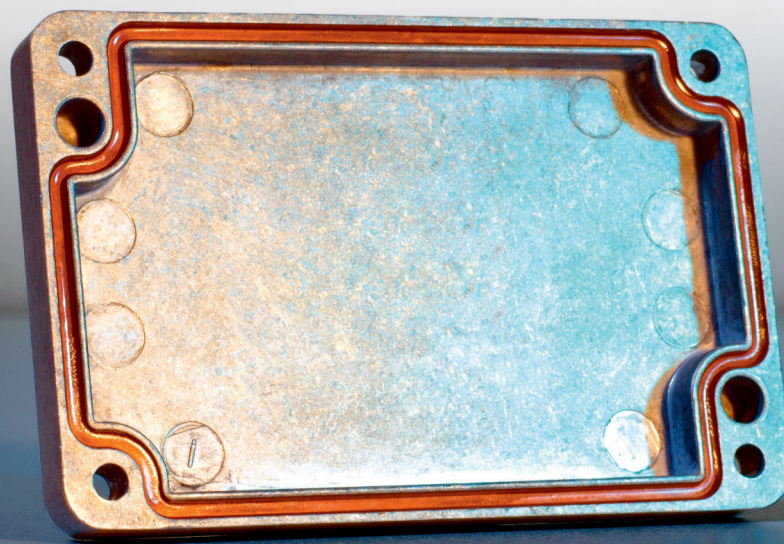

## Technical parameters

		DELO® PHOTOBOND® SL4165	DELO® PHOTOBOND® SL VE 529236
<b>Color</b>		yellowish fluorescent	colorless fluorescent
<b>Viscosity [cP = mPas]</b>		124,000	85,000
<b>Min. curing time [s]</b> DELO® Standard 23, LED intensity 200 mW/cm², DELOLUXcontrol	100 µm layer thickness	6	3
	1,000 µm layer thickness	10	5
<b>Compression set [%]</b> by the criteria of DIN ISO 815		15	20
<b>Elongation at tear [%]</b> DIN EN ISO 527		170	180
<b>Shore hardness A</b> by the criteria of DIN EN ISO 868		41	60
<b>Water absorption [%]</b>		0.2	1.4
<b>Storage life at room temperature</b> +32 °F to +77 °F (0 °C to +25 °C)		6 months	3 months

SL = SealIng

## CONTACT

**DELO** Industrial Adhesives  
Headquarters

► **Germany** · Windach/Munich ...

..... [www.DELO-adhesives.com](http://www.DELO-adhesives.com)

03/19

ADHESIVES

DISPENSING

CURING

CONSULTING

**DELO**

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of a product for the intended purpose by considering all specific requirements and by applying standards the customer deems suitable (e. g. DIN 2304-1). Type, physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. All data provided are typical average values or uniquely determined parameters measured under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for a specific purpose. Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent. All products provided by DELO® are subject to DELO®'s General Terms of Business. Verbal ancillary agreements are deemed not to exist.

© DELO® – This brochure including any and all parts is protected by copyright. Any use not expressly permitted by the Urheberrechtsgesetz (German Copyright Act) shall require DELO®'s written consent. This shall apply without limitation to reproductions, duplications, disseminations, adaptations, translations and microfilms as well as to the recording, processing, duplication and/or dissemination by electronic means.