


# DELOLUX 503

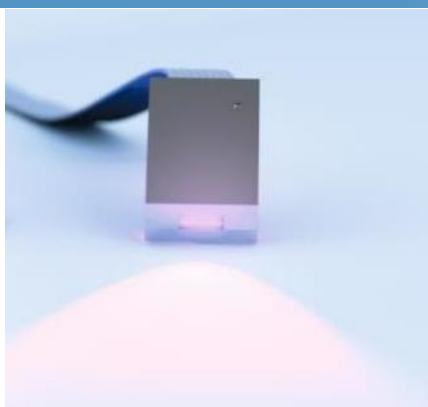

## Small – compact - powerful

DELOLUX 503 appeals for its compact size, excellent performance, and flexible uses.

### Technical data

Descriptions	High-intensity spot light source
Lamp head dimensions	20 mm × 7 mm × 37 mm
Light exit area	10 mm × 3 mm (30° downwards)
Wavelength / typical intensity	365 nm: ≥ 1,000 mW/cm <sup>2</sup> @ 15 mm 400 nm: ≥ 1,600 mW/cm <sup>2</sup> @ 15 mm
Cooling mechanism	Powerguide passively cooled Heatsink in the lamp head
Control	DELOLUX pilot and optionally downstream PLC
Safety	Intensity measured with DELOLUXcontrol
Product compatibility	DELOLUX pilot S series

