


DELOLUX pilot S4i

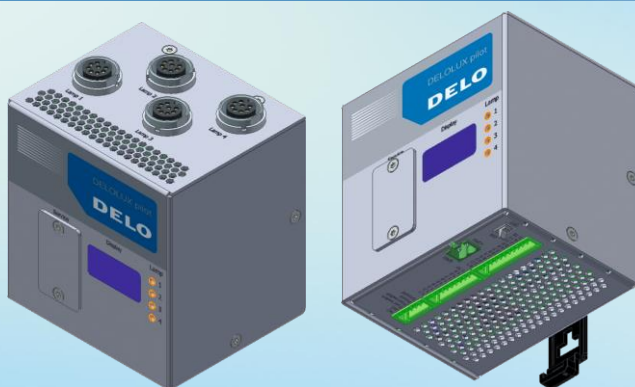

Base unit of the DELOLUX 50 series for installation in the switch cabinet

The DELOLUX pilot S4i serves as power and control unit for up to 4 lamp heads in the DELOLUX 50x series. The lamp heads can be switched individually via a superior PLC unit. Parameters can only be set via the PLC unit.

Technical data

Description	Lamp-independent base unit for up to 4 lamp heads
Control	PLC with up to 3 Phoenix terminal strips
Dimensions (W x D x H)	94 mm x 104 mm x 86 mm
Operating temperature	+15 °C to +45 °C
Power consumption	200 W
Settings	Power setting: 5 % to 100 % (increments 0.2 %) Irradiation time: 0.025 s bis ∞ s
Position for operation	Switch cabinet
User interface	Three-digit 7-segment display
Weight	440 g
Product compatibility	DELOLUX 50 series DELOLUX 502 DELOLUX 503 DELOLUX 504