

DELO-DUOPOX[®] AD894

modified epoxy resin | 2C | room-temperature-curing

filled | flowable, suitable for side-by-side cartridges

Special features of product

- compliant with RoHS Directive 2015/863/EU
- compliant with limits of VOC content in adhesive acc. to GB33372-2020

Function

- construction adhesive

Typical area of use

- -40 - 140 °C

Curing

Curing time

*until initial strength
at rt approx. +23 °C
tensile shear strength 1 - 2 MPa*

5 h

*until functional strength
at rt approx. +23 °C
tensile shear strength > 10 MPa*

7 h

*until final strength
at rt approx. +23 °C*

24 h

Processing

Mixing ratio A : B - volume

2 : 1

Mixing ratio A : B - weight

7 : 3

Processing time after mixing

*in 100 g batch
at rt approx. +23 °C*

45 min

Storage life in unopened original container

at +18 °C to +25 °C

6 month(s)

Technical properties

Color in cured condition in 1 mm layer thickness

black

Transparency in cured condition in 1 mm layer thickness	opaque
Filler particle type	minerals

Parameters

Density <i>Component A DELO Standard 13 liquid</i>	1.37	g/cm ³
Density <i>Component B DELO Standard 13 liquid</i>	1.18	g/cm ³
Viscosity <i>Component A liquid Rheometer Shear rate: 2 1/s Gap: 500 µm</i>	40000	mPa·s
Viscosity <i>Component B liquid Rheometer Shear rate: 2 1/s Gap: 500 µm</i>	30000	mPa·s
Tensile shear strength <i>by the criteria of DIN EN 1465 AI AI Pretreatment: sand-blasted at approx. +23 °C 7 d</i>	19	MPa
Tensile shear strength <i>DELO Standard 39 AI AI Pretreatment: sand-blasted at approx. +23 °C 7 d</i>	31	MPa
Peel resistance <i>DELO Standard 38 Steel Steel Pretreatment: sand-blasted at approx. +23 °C 7 d</i>	0.7	N/mm
Tensile strength <i>by the criteria of DIN EN ISO 527 at approx. +23 °C 7 d</i>	41	MPa
Elongation at tear <i>by the criteria of DIN EN ISO 527 at approx. +23 °C 7 d</i>	2.1	%
Young's modulus <i>by the criteria of DIN EN ISO 527 at approx. +23 °C 7 d</i>	2300	MPa
Shore hardness D <i>by the criteria of DIN EN ISO 868 at approx. +23 °C 7 d</i>	73	
Glass transition temperature <i>DELO Standard 24 Rheometer at approx. +23 °C 7 d</i>	63	°C
Coefficient of linear expansion <i>DELO Standard 26 TMA Evaluation T: 30 °C - 50 °C</i>	91	ppm/K
Coefficient of linear expansion <i>DELO Standard 26 TMA Evaluation T: 70 °C - 150 °C</i>	178	ppm/K

Shrinkage 4 vol. %
DELO Standard 13 | at approx. +23 °C | 7 d

Water absorption 0.3 wt. %
by the criteria of DIN EN ISO 62 | Layer thickness: 4 mm | at approx. +23 °C | 7 d | Type of storage: Media | Medium: Distilled water | Storage temperature: at approx. +23 °C | Duration: 24 h

Decomposition temperature 215 °C
DELO Standard 36 | at approx. +23 °C | 7 d

Volume resistivity >1xE13 Ohm·cm

Surface resistance >1xE13 Ohm
by the criteria of DIN EN 62631-3-2

Dielectric strength 14 kV/mm
by the criteria of DIN EN 60243-1

Creep resistance CTI M 600
by the criteria of DIN EN 60112


Relative permittivity 4.0
by the criteria of RF-IV | 1 MHz

Relative permittivity 3.7
by the criteria of RF-IV | 1 GHz


Relative permittivity 4.0
by the criteria of RF-IV | 10 MHz

Relative permittivity 3.9
by the criteria of RF-IV | 100 MHz


Tensile shear strength measured at the stated temperatures
 Substrates: Al/Al, by the criteria of DIN EN 1465

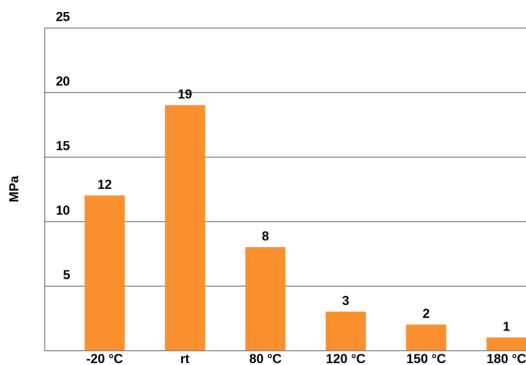


Compression shear strength after media storage for 1000 h, DELO Standard 5

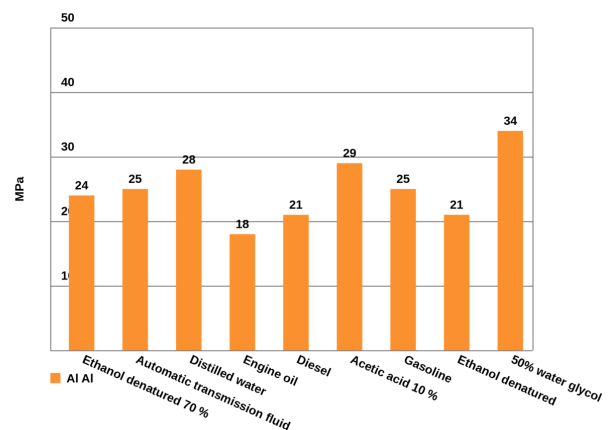


Young's modulus after temperature storage, by the criteria of DIN EN ISO 527

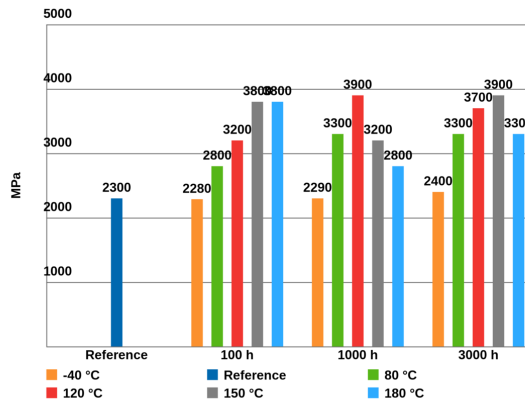

Tensile shear strength after temperature storage
Substrates: Al/Al, by the criteria of DIN EN 1465

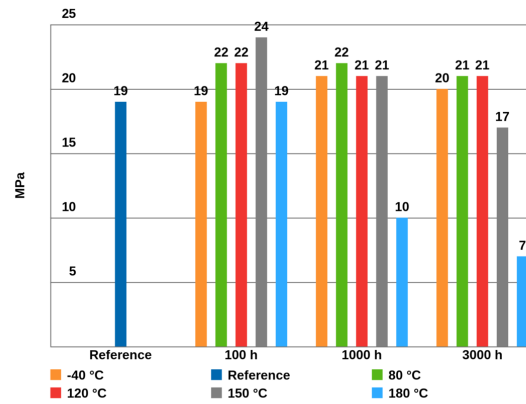

Tensile strength after temperature storage, by the criteria of DIN EN ISO 527

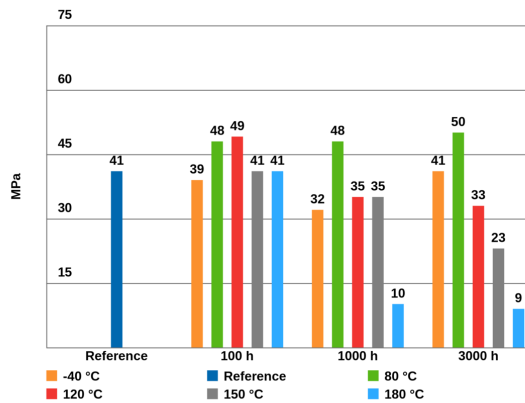

Converting table

°F = (°C x 1.8) + 32	1 MPa = 145.04 psi
1 inch = 25.4 mm	1 GPa = 145.04 ksi
1 mil = 25.4 µm	1 cP = 1 mPa·s
1 oz = 28.3495 g	1 N = 0.225 lb

General curing and processing information

The curing time stated in the technical data was determined in the laboratory. It can vary depending on the adhesive quantity and component geometry and is therefore a reference value. Curing can be supported or accelerated by heat input. Additional heat input can change the physical properties of the product. Values measured after 24 h at approx. 23 °C / 50 % r.h., unless otherwise specified.

General

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of a product for the intended purpose by considering all specific requirements and by applying standards the customer deems suitable (e. g. DIN 2304-1). Type, physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. All data provided are typical average values or uniquely determined parameters measured under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for a specific purpose.

Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent.

All products provided by DELO are subject to DELO's General Terms of Business. Verbal ancillary agreements are deemed not to exist.

Instructions for use

You can find further details in the instructions for use.

The instructions for use are available on www.DELO-adhesives.com.

We will be pleased to send them to you on demand.

Occupational health and safety

See material safety data sheet.

Specification

Nothing contained in this Technical Datasheet shall be interpreted as any express warranty or guarantee. This Technical Datasheet is for reference only and does not constitute a product specification. Please ask our responsible Sales Engineer for the applicable product specification which includes defined ranges. DELO is neither liable for any values and content of this Technical Datasheet nor for oral or written recommendations regarding the use, unless otherwise agreed in writing. This limitation of liability is not applicable for damages resulting from intent, gross negligence or culpable breach of cardinal obligations, nor shall it apply in case of death or personal injury or in case of liability under any applicable compulsory law.

CONTACT

DELO-DUOPOX AD894 | as of 17.01.2022 15:42 | Page 5 of 5

DELO Industrial Adhesives
Headquarters

► Germany · Windach / Munich ... www.DELO-adhesives.com

ADHESIVES

DISPENSING

CURING

CONSULTING

DELO