

### DELO® PHOTOBOND® GB422

UV- and light curing acrylate adhesive, low viscosity

#### Base

- modified acrylate
- one-component, solvent-free

#### Use

- multi-purpose, tension-equalizing and humidity resistant adhesive for mixed material bondings
- combined light and UV curing also enables the curing of components which are difficult to transmit
- for flacon bonding
- the cured product is normally used in a temperature range of -40 °C to +120 °C; depending on the application, other limits may be more reasonable
- compliant with RoHS directive 2015/863/EU

#### Processing

- the adhesive is supplied ready for use; in case of cool storage, it must be ensured that the container is conditioned to room temperature before use
- the containers are conditioned at room temperature (+18 °C to +25 °C); the conditioning time is approx. 0.5 h for containers up to 50 ml and approx. 4 h for containers up to 1,000 ml; additional heat addition is not allowed
- the adhesive can be applied by dispensing
- the surfaces to be bonded must be dry as well as free of dust, grease and other contaminations
- dispensing valves and product-bearing elements must be carefully cleaned before use, residues of other products must be completely removed; isopropanol is recommended to remove DELO PHOTOBOND residues
- for further information please refer to our instructions for use DELO PHOTOBOND and the brochure "Light Curing"

#### Curing

- curing with UV light or visible light in a wavelength range from 320 to 420 nm. DELOLUX LED curing lamps are especially suitable as per the chart below. All standard DELOLUX HID discharge lamps are also suitable
- increased intensities shorten the required irradiation time, lower intensities prolong it


Lamp type	DELOLUX 20 / 50 / 80		
Wavelength [nm]	365	400	460
Suitability	+	++	-

- not suitable + suitable ++ especially suitable

**DELO** Industrial Adhesives  
DELO-Allee 1  
86949 Windach · Germany  
Phone +49 8193 9900-0  
Fax +49 8193 9900-144  
info@DELO.de · www.DELO.de

## Absorption spectrum

photoinitiation system in acrylate matrix

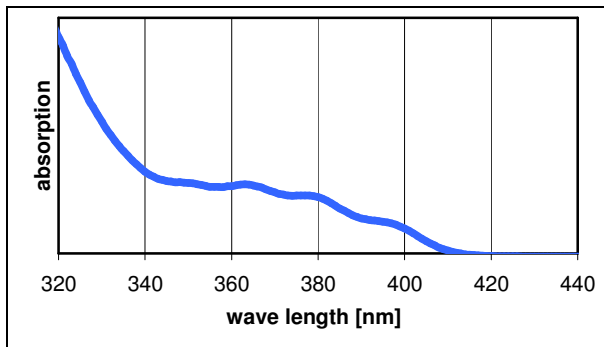

## Curing parameters

- dependent on material thickness and absorption, adhesive layer thickness, lamp type and distance between lamp and adhesive layer

## Technical data

### *Color*

cured in a layer thickness of approx. 0.1 mm

colorless fluorescent

### Density [g/cm<sup>3</sup>]

at room temperature (approx. 23 °C)

1.0

### Light fastness

after exposure to UV light in sunlight simulator

DELO Standard 25

duration of exposure in sunlight simulator	0 h	500h	1000 h
chromaticity coordinate of the L,a,b-color-space	1	2,9	3,29

### Viscosity [mPas]

at 23 °C, rheometer, 10 1/s

4600

### Viscosity [mPas]

at 23 °C, Brookfield spindle/rpm 7/5

5000

### Minimal curing time [s]

DELO Standard 23, UVA intensity: 60 mW/cm<sup>2</sup>, DELOLUXcontrol

9

### Surface

tacky

### Compression shear strength glass/glass [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm<sup>2</sup>, DELOLUXcontrol, irradiation time: 60 s

11

### Compression shear strength glass/PC [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm<sup>2</sup>, DELOLUXcontrol, irradiation time: 60 s

7

### Compression shear strength glass/ABS [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm<sup>2</sup>, DELOLUXcontrol, irradiation time: 60 s

7

### Compression shear strength glass/Al [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm<sup>2</sup>, DELOLUXcontrol, irradiation time: 60 s

10


### Compression shear strength glass/FR4 [MPa]

DELO Standard 5


UVA intensity: 55 - 60 mW/cm<sup>2</sup>, DELOLUXcontrol, irradiation time: 60 s

10


Compression shear strength glass/PA [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol, irradiation time: 60 s	10
Compression shear strength glass/PBT [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> ; DELOLUXcontrol, irradiation time: 60 s	5
Compression shear strength glass/PC-ABS [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol, irradiation time: 60 s	8
Compression shear strength glass/PP [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol, irradiation time: 60 s	2
Compression shear strength glass/stainless steel [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol, irradiation time: 60 s	10
Compression shear strength glass/surlyn [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol, irradiation time: 60 s	4
Compression shear strength PC/PC [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol, irradiation time: 60 s	4
Compression shear strength PMMA/PMMA [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol, irradiation time: 60 s	7
Tensile strength [MPa] according to DIN EN ISO 527	11
Elongation at tear [%] according to DIN EN ISO 527	370
Young's modulus [MPa] according to DIN EN ISO 527	50
Compression shear strength after exposure to UV light in a sunlight simulator	

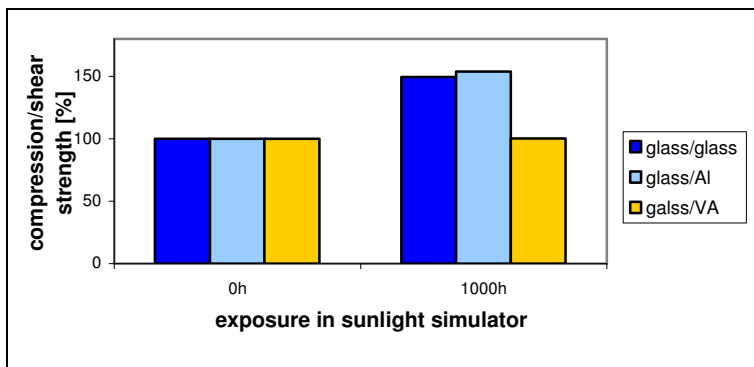

**Compression shear strength**  
after aging

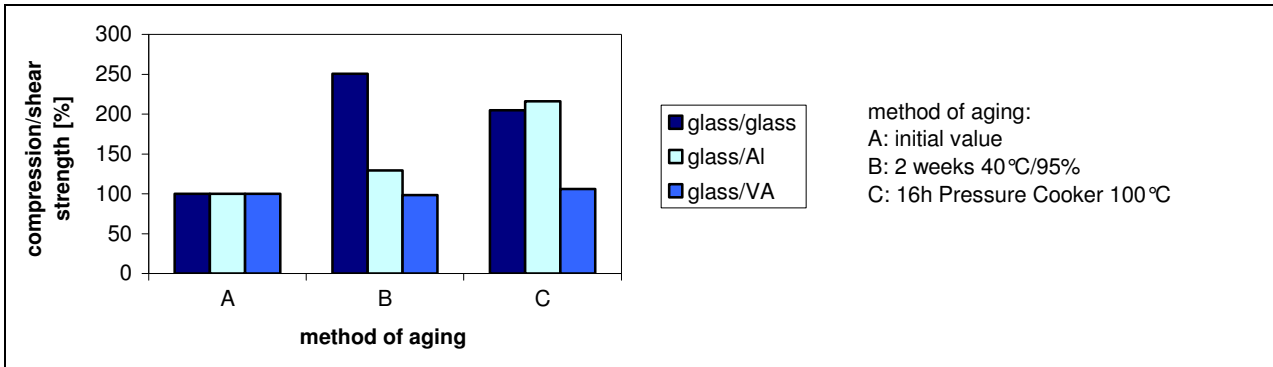

**Compression shear strength**  
after aging

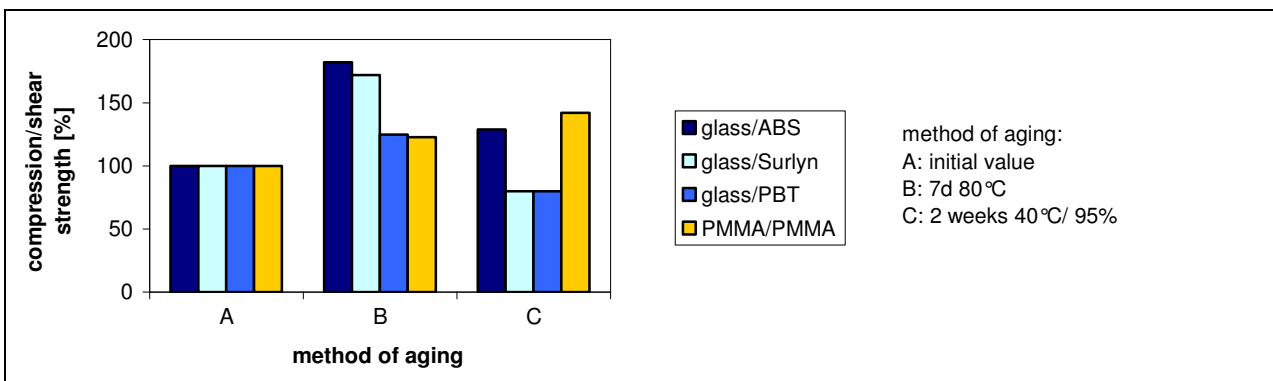

Shore hardness A  
DIN 53505

87

Shore hardness D  
DIN 53505

25

Glass transition temperature [°C]  
rheometer

78

Coefficient of linear expansion [ppm/K]  
in a temperature range of +30 to +70 °C

205

Shrinkage [vol. %]  
DELO Standard 13

5.4

Water absorption  
according to DIN EN ISO 62, 24 h at room temperature (approx. 23 °C)

1.5

Storage life  
at room temperature (0 °C to +25 °C) in unopened original container

6 months

## **Instructions and advice**

### **General**

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of a product for the intended purpose by considering all specific requirements and by applying standards the customer deems suitable (e. g. DIN 2304-1). Type, physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. All data provided are typical average values or uniquely determined parameters measured under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for a specific purpose.

Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent.

All products provided by DELO are subject to DELO's General Terms of Business. Verbal ancillary agreements are deemed not to exist.

### **Instructions for use**

The instructions for use of DELO PHOTOBOND are available on: [www.DELO.de](http://www.DELO.de). We will be pleased to send them to you on demand.

### **Occupational health and safety**

see material safety data sheet

### **Specification**

The properties in italics are part of the specification. Ranges with clear limits are defined for them and others, where applicable. In the course of the QA test, each batch is tested for these properties and the maintenance of the limits is ensured. The measuring methods used can deviate from those specified in the data sheet. Details can be found in the QA test report.